


# SPECIFICATION SHEET

## Iconic Velvet

230 to 450 GSM

(ON LINE COATED BOARD) M/C Deckle-365-370cms

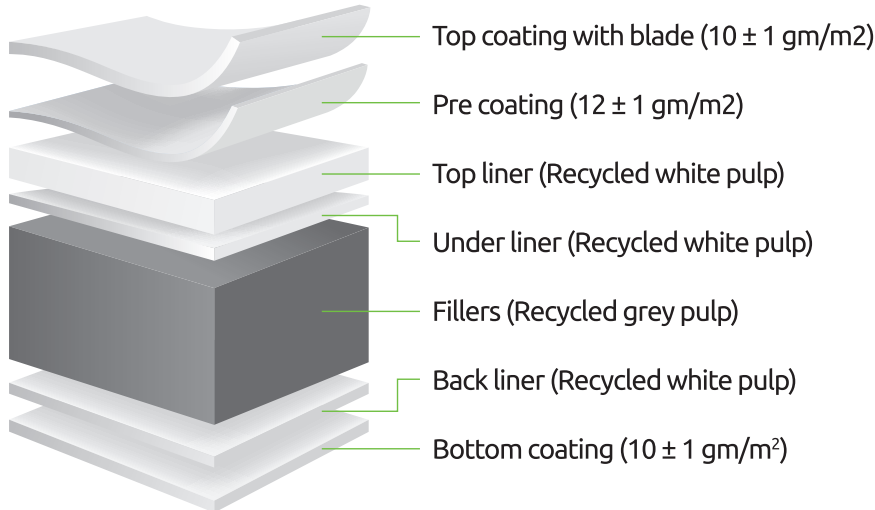

### Application

1. Packaging board
2. High speed printing job

### Recommended for Multi-color printing

1. Letter press
2. Offset
3. Rotogravure

Substance	Stiffness (Taber)			Caliper	Bulk	Parameters		
	MD	CD	GM			T 489 om-99	Microns	
gm/m <sup>2</sup>				Micron	cc/gm.	Roughness - PPS T 555 om - 99	Microns	2.0±0.5
230	42	18	28	265	1.15	Brightness Top T 452 om - 98	%	79±1
250	60	25	39	288	1.15	Brightness Bottom T 452 om - 98	%	74±1
260	80	31	50	304	1.17	Gloss at 75 T 480 om - 99	%	45±3
285	90	35	56	333	1.17	Plybond (scott) Tappi : T-833	Jules	>100
295/300	100	40	63	366	1.17	IGT Dry Pick ISO 3782	(m/sec)	>1.0
320	135	55	86	378	1.18	COBB Top Bottom T 441 om - 98	g/m <sup>2</sup>	35-50 50-100
330	140	56	89	396	1.20	Smoothness-Bendtsen ISO-8791-2	ml/min	40-70
350	145	58	92	424	1.21	Burst Factor Tappi T807	-	14±2
360	150	60	95	439	1.22	Moisture Content Tappi T412 om 02	%	7.5%±1.0%
400	170	70	109	488	1.22	Tolerance		
420	225	95	146	525	1.25	±3%	±10%	
450	320	135	208	563	1.25	±5%	±5%	